

4

3

2

1


RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR



Technical Specification

Current Rating: 3A AC, DC  
Voltage Rating: 500V AC,DC  
Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
Contact Resistance: 20mΩ  
Insulation Resistance: 500MΩ  
Withstanding Voltage: 1000V AC/minute  
Material Pin: Brass  
Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	2.50	7.50	09P	20.00	25.00
03P	5.00	10.00	10P	22.50	27.50
04P	7.50	12.50	11P	25.00	30.00
05P	10.00	15.00	12P	27.50	32.50
06P	12.50	17.50	13P	30.00	35.00
07P	15.00	20.00	14P	32.50	37.50
08P	17.50	22.50	15P	35.00	40.00

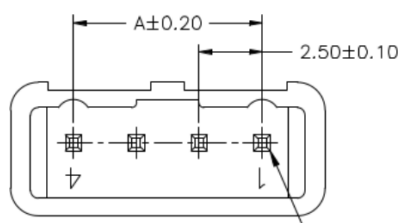


Circuit 1

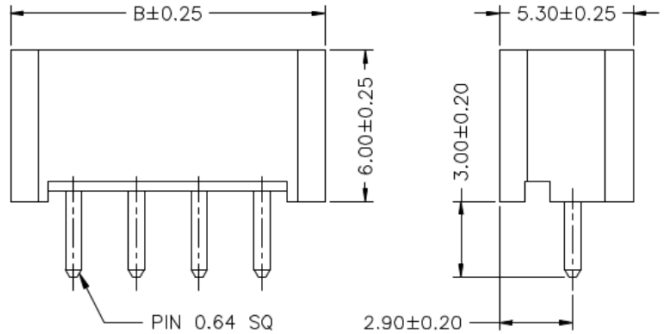


order information

C250406	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~15	01= gold flash	B1= top	A= bag	xx= on request	
xx= on request	100= tin		xx= on request		
			xx= on request		

A

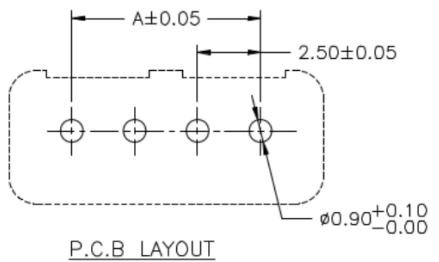

P.C.B. LAYOUT



	<b>PROJECTON</b>		<b>Single Row Wafer THT Type, Top Entry</b>		
	<b>DATE</b>	03.08.2017	Customer Drawing-No.:		
	<b>DRAWN</b>	MR	Drawing-No.: 2161356		
	<b>CHECKED</b>	BR			
<b>APPROVED</b>	BR	<b>UNIT:</b>	<b>SCALE:</b>	<b>SIZE:</b>	A4

Tolerance:  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.05

4

3

2

1