

4

3

2

1




RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR

Technical Specification



Current Rating: 3A AC, DC  
 Voltage Rating: 500V AC,DC  
 Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
 Contact Resistance: 10mΩ  
 Insulation Resistance: 500MΩ  
 Withstanding Voltage: 800V AC/minute  
 Material Pin: Brass  
 Material: Thermoplastic, UL94V-0


Circuit No.	Dimensions	
	A	B
02PN	2.50	5.00
03PN	5.00	7.50
04PN	7.50	10.00
05PN	10.00	12.50
06PN	12.50	15.00
07PN	15.00	17.50
08PN	17.50	20.00
09PN	20.00	22.50
10PN	22.50	25.00
11PN	25.00	27.50
12PN	27.50	30.00
13PN	30.00	32.50
14PN	32.50	35.00
15PN	35.00	37.50

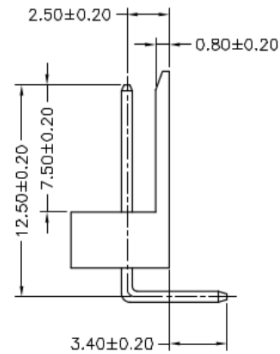

order information

C250408	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~15	01= gold flash	B2= side	A= bag	xx= on request	
xx= on request	100= tin		xx= on request		
			xx= on request		





## BRCONNECTORS

Single Row Wafer  
THT Type, Side Entry

Tolerance: .X ± 0.25 .XX ± 0.15 .XXX ± 0.05	PROJECTON				
	DATE	03.08.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161364		
	CHECKED	BR			
APPROVED	BR		UNIT: mm	SCALE:	SIZE: A4

D

C

B

A

D

C

B