

4

3

2

1





REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR

Technical Specification



Current Rating: 3A AC, DC
Voltage Rating: 500V AC,DC
Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
Contact Resistance: 10mΩ
Insulation Resistance: 500MΩ
Withstanding Voltage: 800V AC/minute
Material Pin: Brass
Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02PN	2.50	5.00
03PN	5.00	7.50
04PN	7.50	10.00
05PN	10.00	12.50
06PN	12.50	15.00
07PN	15.00	17.50
08PN	17.50	20.00
09PN	20.00	22.50
10PN	22.50	25.00
11PN	25.00	27.50
12PN	27.50	30.00
13PN	30.00	32.50
14PN	32.50	35.00
15PN	35.00	37.50

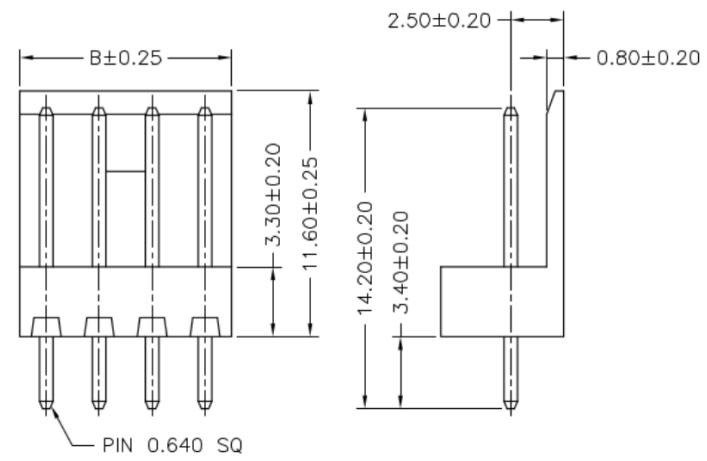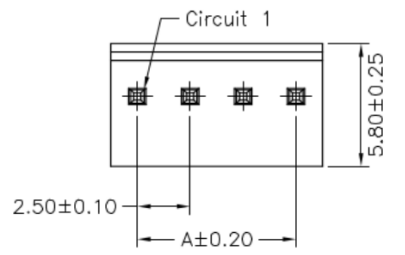

order information

C250408	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~15	01= gold flash	B1= top	A= bag	xx= on request	
xx= on request	100= tin		xx= on request		
			xx= on request		



	PROJECTON		Single Row Wafer THT Type, Top Entry		
	DATE	03.08.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161363		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.