

4

3

2




1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.07.18	MR

Technical Specification


Current Rating: 3 A AC, DC  
Voltage Rating: 600 V AC, DC  
Temperature: -40°C to +105°C  
Contact Resistance: 20 mΩ  
Insulation Resistance: 1000 MΩ  
Withstanding Voltage: 500 V AC/minute  
Material Pin: Brass  
Material: High Temperature Thermoplastic, UL94V-0

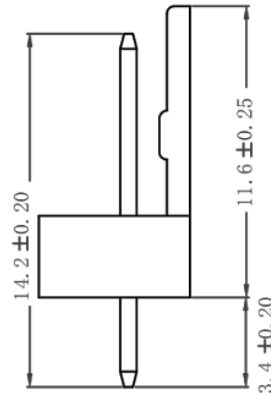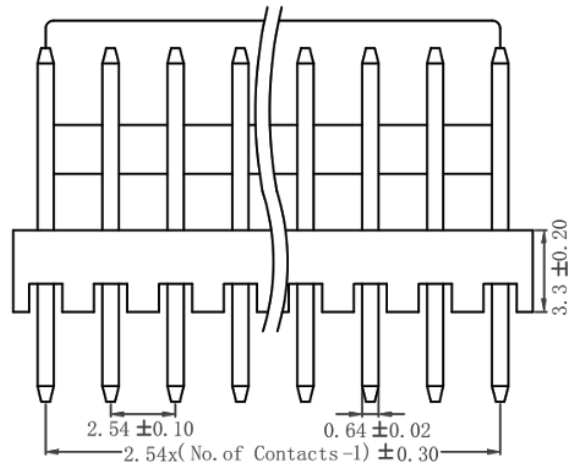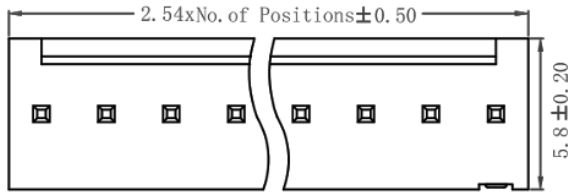

order information

C254302	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~20	100= tin	B1= top	A= bag	xx= on request	
	xx= on request		xx= on request		

	PROJECTON		Single Row Wafer THT Type, Top Entry	
	DATE	03.07.2018	Customer Drawing- No.:	
	DRAWN	MR	Drawing- No.: 2161559	
	CHECKED	BR		
APPROVED	BR	UNIT:	SCALE:	SIZE: A4

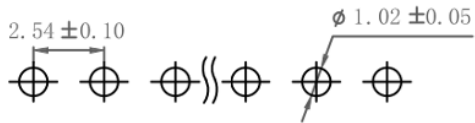

Recommended PCB Layout (PCB TOLERANCE ±0.05)

4

3

2

1