

4

3

2

1





RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR

Technical Specification



Current Rating: 4A AC, DC
Voltage Rating: 250V AC,DC
Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
Contact Resistance: 10mΩ
Insulation Resistance: 1000MΩ
Withstanding Voltage: 1000V AC/minute
Material Pin: Brass
Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	2.54	5.08	12P	27.94	30.48
03P	5.08	7.62	13P	30.48	33.02
04P	7.62	10.16	14P	33.02	35.56
05P	10.16	12.70	15P	35.56	38.10
06P	12.70	15.24	16P	38.10	40.64
07P	15.24	17.78	17P	40.64	43.18
08P	17.78	20.32	18P	43.18	45.72
09P	20.32	22.86	19P	45.72	48.26
10P	22.86	25.40	20P	48.26	50.80
11P	25.40	27.94			

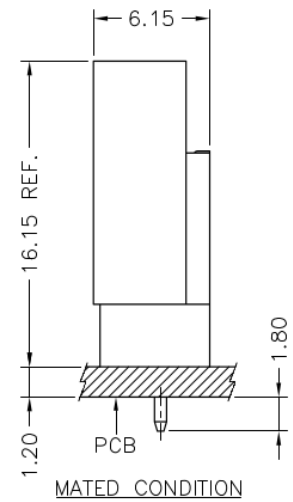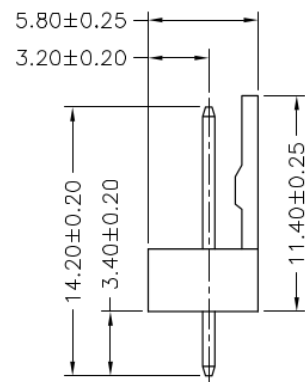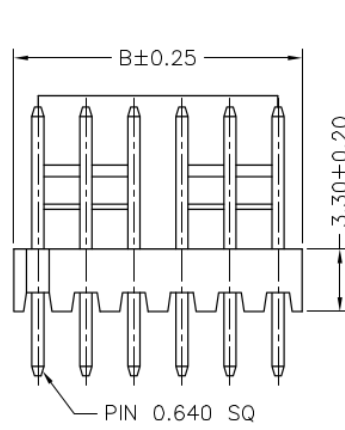

order information

C254402	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~20	01= gold flash	B1= top	A= bag	xx= on request	
xx= on request	100= tin		xx= on request		
			xx= on request		



BRCONNECTORS

**Single Row Wafer
THT Type, Top Entry**

Tolerance: .X ± 0.25 .XX ± 0.15 .XXX ± 0.05	PROJECTON				
	DATE	03.08.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161375		
	CHECKED	BR			
APPROVED	BR		UNIT: mm	SCALE:	SIZE: A4

D

C

B

A

D

C

B