

4

3

2

1






REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR

Technical Specification



Current Rating: 7A AC, DC  
 Voltage Rating: 250V AC,DC  
 Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
 Contact Resistance: 10mΩ  
 Insulation Resistance: 1000MΩ  
 Withstanding Voltage: 1500V AC/minute  
 Material Pin: Brass  
 Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02PN	3.96	7.92
03PN	7.92	11.88
04PN	11.88	15.84
05PN	15.84	19.80
06PN	19.80	23.76
07PN	23.76	27.72
08PN	27.72	31.68
09PN	31.68	35.64
10PN	35.64	39.60
11PN	39.60	43.56
12PN	43.56	47.52
13PN	47.52	51.48
14PN	51.48	55.44
15PN	55.44	59.40

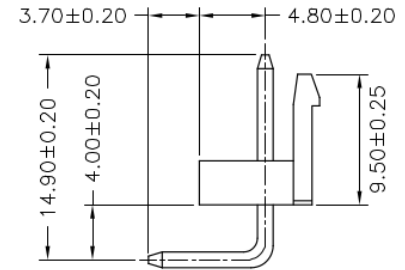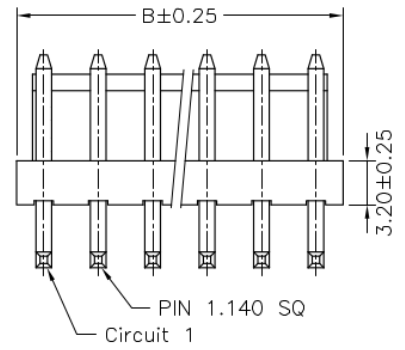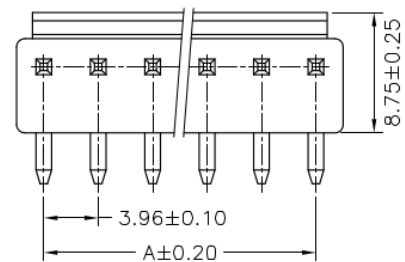

order information

C396402	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~15	01= gold flash	B2= side	A= bag	xx= on request	
xx= on request	100= tin	xx= on request			
xx= on request					



**PROJECTON**

**DATE** 03.08.2017

**DRAWN** MR

**CHECKED** BR

**APPROVED** BR

**Customer Drawing-No.:**

**Drawing-No.:** 2161391

**UNIT:** mm

**SCALE:**

**SIZE:** A4