

RoHS
REACH
compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR



Technical Specification


Current Rating: 7A AC, DC
 Voltage Rating: 250V AC,DC
 Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
 Contact Resistance: 10mΩ
 Insulation Resistance: 1000MΩ
 Withstanding Voltage: 1500V AC/minute
 Material Pin: Brass
 Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02P	3.96	7.92
03P	7.92	11.88
04P	11.88	15.84
05P	15.84	19.80
06P	19.80	23.76
07P	23.76	27.72
08P	27.72	31.68
09P	31.68	35.64
10P	35.64	39.60
11P	39.60	43.56
12P	43.56	47.52






order information

C396403	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~12	01= gold flash	B2= side	A= bag	xx= on request	
xx= on request	100= tin	xx= on request			
xx= on request					


 BRCONNECTORS	Single Row Wafer THT Type, Side Entry	
	PROJECTON	
	DATE	03.08.2017
	DRAWN	MR
CHECKED	BR	Customer Drawing-No.:
APPROVED	BR	Drawing-No.: 2161396
		UNIT: mm
		SCALE:
		SIZE: A4



Circuit 1

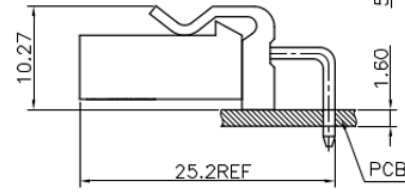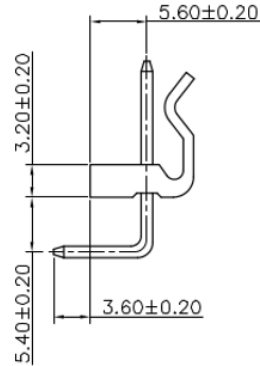

MATED CONDITION



P.C.B. LAYOUT