

4

3

2

1





RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR

Technical Specification



Current Rating: 7A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
 Contact Resistance: 10mΩ
 Insulation Resistance: 1000MΩ
 Withstanding Voltage: 1500V AC/minute
 Material Pin: Brass
 Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02P	5.08	10.16
03P	10.16	15.24
04P	15.24	20.32
05P	20.32	25.40
06P	25.40	30.48
07P	30.48	35.56
08P	35.56	40.64
09P	40.64	45.72

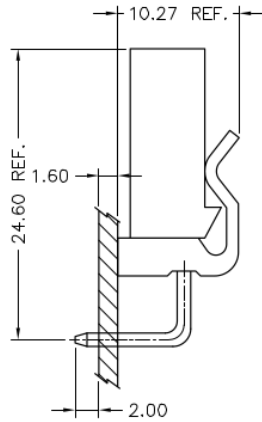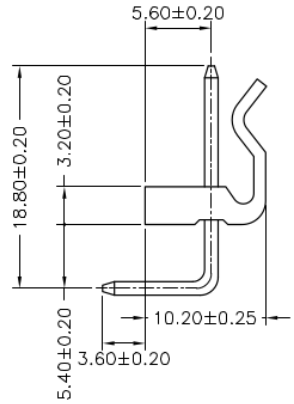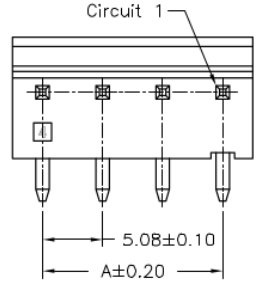

order information

CS08402	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~09	01= gold flash	B2= side	A= bag	xx= on request	
xx= on request	100= tin	xx= on request			

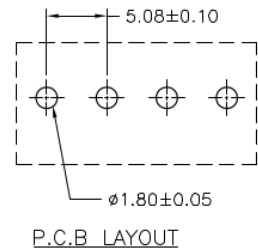

BRCONNECTORS

**Single Row Wafer
THT Type, Side Entry**

Tolerance: .X ± 0.25 .XX ± 0.15 .XXX ± 0.05	PROJECTON				
	DATE	03.08.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161403		
	CHECKED	BR			
APPROVED	BR				
		UNIT:	SCALE:	SIZE:	A4