

4

3

2

1




REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR


Technical Specification

Current Rating: 2A AC, DC
Voltage Rating: 125V AC,DC
Temperature: -25°C to +85°C
high temperature: on request
Contact Resistance: 20mΩ
Insulation Resistance: 1000MΩ
Withstanding Voltage: 800V AC/minute
Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02P	2.00	4.90
03P	4.00	6.90
04P	6.00	8.90
05P	8.00	10.90
06P	10.00	12.90
07P	12.00	14.90
08P	14.00	16.90
09P	16.00	18.90
10P	18.00	20.90
11P	20.00	22.90
12P	22.00	24.90
13P	24.00	26.90
14P	26.00	28.90
15P	28.00	30.90

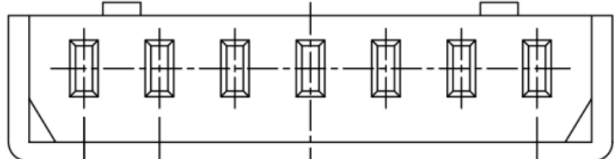


2.00±0.10
A±0.20

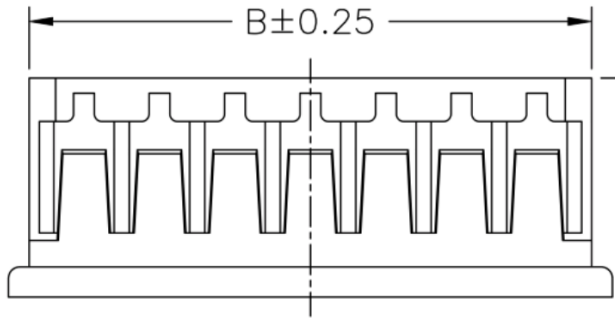


B±0.25

5.80±0.25

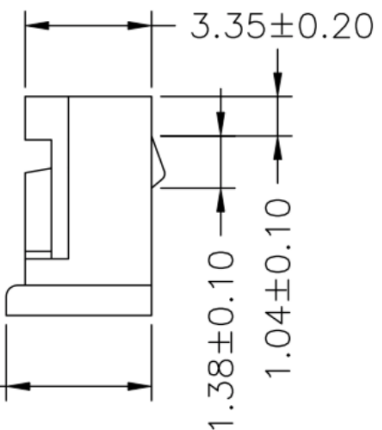

3.80±0.25

1.38±0.10
1.04±0.10

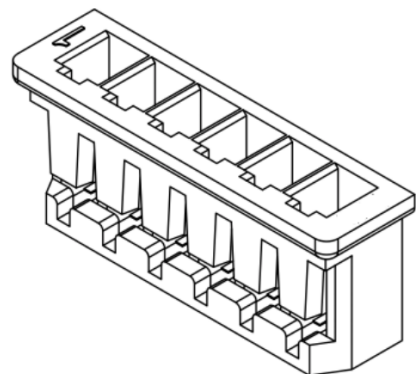

order information

D200403	xx	xx	xx
No. of Positions	Packaging	Special Customer	
02~15	A= bag	xx= on request	
xx= on request	xx= on request		




Single Row Housing
Straight Type

Tolerance:
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05

PROJECTON		
DATE	19.06.2017	Customer Drawing-No.:
DRAWN	MR	Drawing-No.: 2161201
CHECKED	BR	
APPROVED	BR	

UNIT: mm SCALE: SIZE: A4

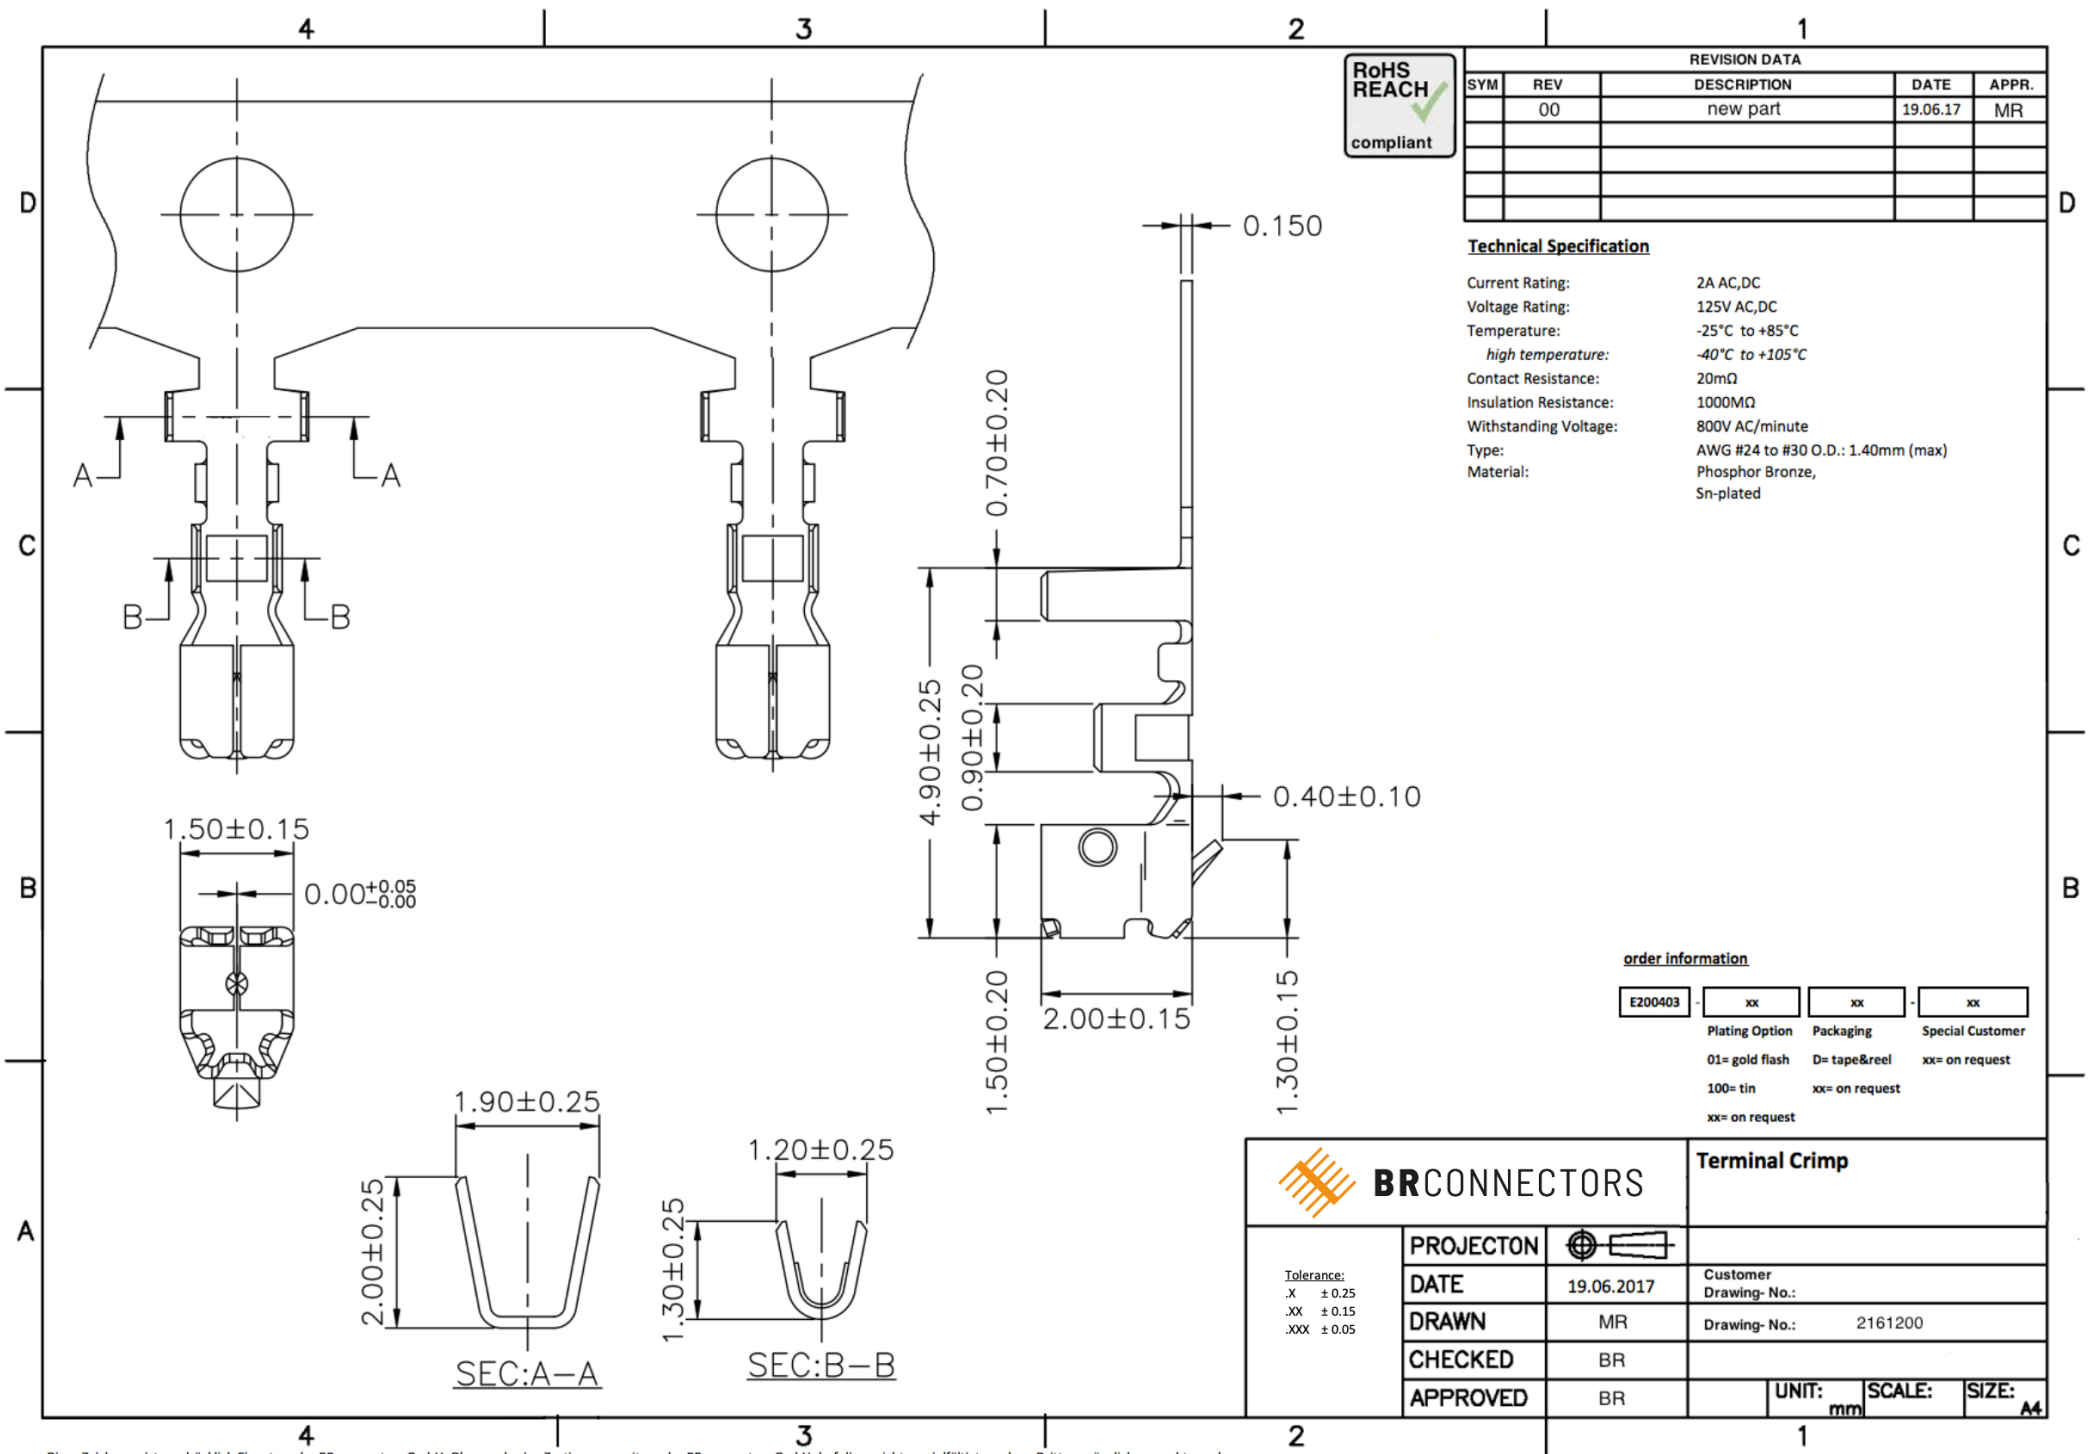

RoHS
REACH
compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR

Technical Specification

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
Contact Resistance: 20mΩ
Insulation Resistance: 1000MΩ
Withstanding Voltage: 800V AC/minute
Type: AWG #24 to #30 O.D.: 1.40mm (max)
Material: Phosphor Bronze, Sn-plated

order information

E200403	xx	xx	xx
Plating Option	Packaging	Special Customer	
01= gold flash	D= tape&reel	xx= on request	
100= tin	xx= on request		
xx= on request			

	BRCONNECTORS		Terminal Crimp		
	PROJECTON				
	DATE	19.06.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161200		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.