

4

3

2

1




REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	29.06.17	MR

Technical Specification


Current Rating: 2A AC, DC
Voltage Rating: 250V AC,DC
Temperature: -25°C to +85°C
high temperature: on request
Contact Resistance: 20mΩ
Insulation Resistance: 1000MΩ
Withstanding Voltage: 1000V AC/minute
Material: Thermoplastic, UL94V-0

	Dimensions			Dimensions			Dimensions	
	A	B		A	B		A	B
2X02P	2.00	4.20	2X15P	28.00	30.20	2X28P	54.00	56.20
2X03P	4.00	6.20	2X16P	30.00	32.20	2X29P	56.00	58.20
2X04P	6.00	8.20	2X17P	32.00	34.20	2X30P	58.00	60.20
2X05P	8.00	10.20	2X18P	34.00	36.20	2X31P	60.00	62.20
2X06P	10.00	12.20	2X19P	36.00	38.20	2X32P	62.00	64.20
2X07P	12.00	14.20	2X20P	38.00	40.20	2X33P	64.00	66.20
2X08P	14.00	16.20	2X21P	40.00	42.20	2X34P	66.00	68.20
2X09P	16.00	18.20	2X22P	42.00	44.20	2X35P	68.00	70.20
2X10P	18.00	20.20	2X23P	44.00	46.20	2X36P	70.00	72.20
2X11P	20.00	22.20	2X24P	46.00	48.20	2X37P	72.00	74.20
2X12P	22.00	24.20	2X25P	48.00	50.20	2X38P	74.00	76.20
2X13P	24.00	26.20	2X26P	50.00	52.20	2X39P	76.00	78.20
2X14P	26.00	28.20	2X27P	52.00	54.20	2X40P	78.00	80.20

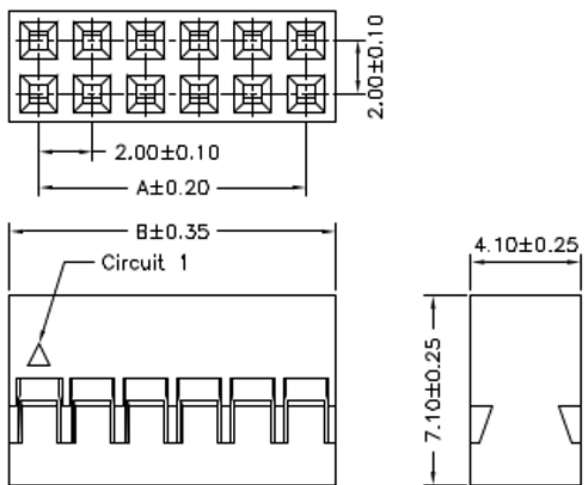

order information

D200408	-	xx	xx	xx	-	xx
No. of Positions	Special	Packaging	Special Customer			
04~44	Z6=without nose	A= bag	xx= on request			
xx= on request	xx= on request					



	Single Row Housing Straight Type			
	PROJECTON		Customer Drawing-No.:	
	DATE	29.06.2017	Drawing-No.: 2161313	
	DRAWN	MR		
	CHECKED	BR		
APPROVED	BR	UNIT:	SCALE:	SIZE:
		mm		A4

A

B

C

D

4

3

2

1