

4

3

2

1


RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	29.06.17	MR

Technical Specification


Current Rating: 2A AC, DC  
 Voltage Rating: 250V AC,DC  
 Temperature: -25°C to +85°C  
*high temperature: on request*  
 Contact Resistance: 20mΩ  
 Insulation Resistance: 1000MΩ  
 Withstanding Voltage: 1000V AC/minute  
 Material: Thermoplastic, UL94V-0

NO.	Dimensions		NO.	Dimensions	
	A	B		A	B
2X02P	2.00	4.20	2X14P	26.00	28.20
2X03P	4.00	6.20	2X15P	28.00	30.20
2X04P	6.00	8.20	2X16P	30.00	32.20
2X05P	8.00	10.20	2X17P	32.00	34.20
2X06P	10.00	12.20	2X18P	34.00	36.20
2X07P	12.00	14.20	2X19P	36.00	38.20
2X08P	14.00	16.20	2X20P	38.00	40.20
2X09P	16.00	18.20	2X21P	40.00	42.20
2X10P	18.00	20.20	2X22P	42.00	44.20
2X11P	20.00	22.20	2X23P	44.00	46.20
2X12P	22.00	24.20	2X24P	46.00	48.20
2X13P	24.00	26.20	2X25P	48.00	50.20

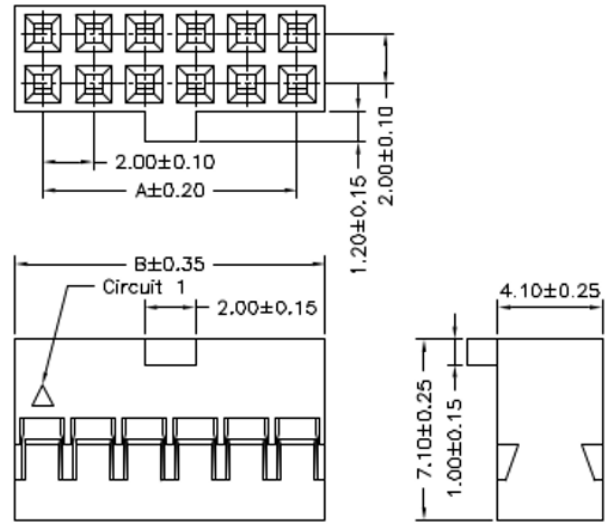

order information

D200408	xx	xx	xx	xx
No. of Positions	Special	Packaging	Special Customer	
04~44	Z5=with nose	A= bag	xx= on request	
xx= on request		xx= on request		



**BRCONNECTORS**

Dual Row Housing Straight Type

Tolerance: .X ± 0.25 .XX ± 0.15 .XXX ± 0.05	PROJECTON				
	DATE	29.06.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161314		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4