


P.C.B. LAYOUT

		linear dimension (Tolerances Standard GB/T 14486-2008)											≡	-	□	//	⊥			
variable range	to	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to					
tolerance		±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4			

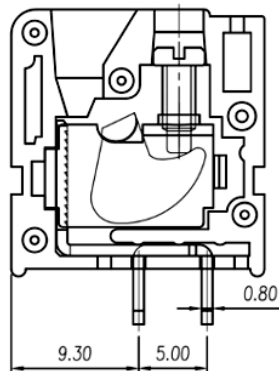

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.02.18	AT

Technical Specifications

Material

Screws: M2.5 Steel Zn plated
 Cage: Steel Zn plated
 Slide block: Steel Zn plated
 Pin header: Brass, Sn plated
 Housing: PA66, UL94V-0

Electrical

UL IEC
 Rated voltage: 300V 250V
 Rated current: 20A 24A
 Wire range: 24-12AWG 2.5mm²
 Contact resistance: 20mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstanding voltage: AC2000V/1Min

Mechanical

Temperature: -40°C to +105°C
 Max. soldering: +250°C/5 sec
 Torque: 0.4Nm/3.6Lbin
 Strip length: 12-13mm

order information

N50094	-	xx	xx	xx	xx
No. of Positions		Colour	Packing	Special Customer	
02~30		10=Green	A= bag		
		xx= on request	BO= Box		
			xx= on request		

	PROJECTON		PCB Print Clamp	
	DATE	22.02.2018	Allgemeintoleranz ISO 2768-m	
	DRAWN	AT	Customer Drawing-No.:	
	CHECKED	MR	Drawing-No.: 2161721	
	APPROVED	BR	UNIT: mm	SCALE:

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.