

RoHS REACH  
compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	01.03.18	AT

**Technical Specifications**

**Material**

Screws: M2.5 Steel Zn plated  
Cage: Brass, Ni plated  
Pin header: Brass, Sn plated  
Housing: PA66, UL94V-0

**Electrical**


Rated voltage:	300V	450V
Rated current:	16A	18A
Wire range:	22-12AWG	2.5mm <sup>2</sup>
Contact resistance:	20mΩ	
Insulation resistance:	500MΩ/DC500V	
Withstanding voltage:	AC2000V/1Min	

**Mechanical**

Temperature: -40°C to +105°C  
Max. soldering: +250°C/5 sec  
Torque: 0.4Nm/3.6Lbin  
Strip length: 6-7mm

**order information**

N75033	xx	xx	xx	xx
No. of Positions	Colour	Packing	Special Customer	
02~24	10=Green	A= bag		
	xx= on request	BO= Box		
		xx= on request		

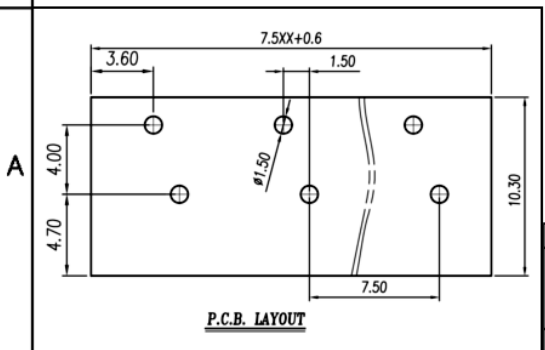

variable range	linear dimension(Tolerances Standard GB/T 14486-2008)															≡	-	□	//	⊥
	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to all	to 5	over 5 to 30	over 30 to 120	over 120 to					
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4				

	<b>PROJECTON</b>		Allgemeintoleranz ISO 2768-m	
	<b>DATE</b>		01.03.2018	
	<b>DRAWN</b>		AT	
	<b>CHECKED</b>		MR	
<b>APPROVED</b>		BR		
		<b>UNIT:</b> mm		<b>SCALE:</b>
				<b>SIZE:</b> A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.