


SECTION A-A

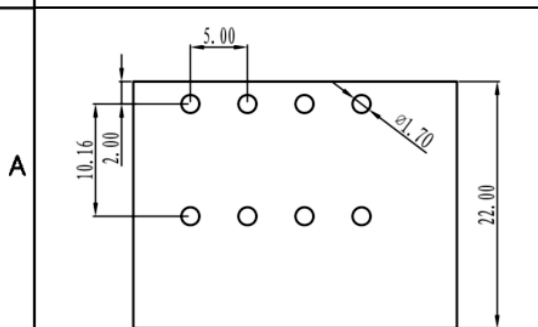

	linear dimension				fillet	chamfer	short angle sid				≡	-	□	//	⊥		
variable range	over 6 to 6	over 30 to 30	over 120 to 120	over 480 to 480	all	over 6 to 6	over 10 to 10	over 50 to 50	over 120 to 120	all	5	over 30 to 30	over 120 to 120	over 120 to 120			
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30°	20°	10°	0.5	0.025	0.06	0.12	0.4

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	13.04.18	AT

Technical Specifications

Material

Pin header: Brass, Sn plated
Housing: PA66, UL94V-0

Electrical

Rated voltage:	300V	IEC 320V
Rated current:	15A	10A
Contact resistance:	20mΩ	
Insulation resistance:	500MΩ/DC500V	
Withstanding voltage:	AC2000V/1Min	

Mechanical

Temp. Range: -40°C to +105°C
Max. soldering: +250°C/5 sec

order information

P50022	-	xx	xx	xx	xx
No. of Positions	Colour	Packing	Special Customer		
02~24	10=Green	A= bag			
	xx= on request	BO= Box			
		xx= on request			

		Box Pin Header	
		PROJECTON	
DATE	13.04.2018	Customer Drawing-No.:	
DRAWN	AT	Drawing-No.:	2161893
CHECKED	MR		
APPROVED	BR	UNIT: mm	SCALE: SIZE: A4