

SECTION A-A

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	13.04.18	AT

Technical Specifications

Material


Pin header: Brass, Sn plated
Housing: PA66, UL94V-0

Electrical

UL	IEC
Rated voltage: 300V	320V
Rated current: 15A	20A
Contact resistance: 20mΩ	
Insulation resistance: 500MΩ/DC500V	
Withstanding voltage: AC2000V/1Min	

Mechanical

Temp. Range: -40°C to +105°C
Max. soldering: +250°C/5 sec

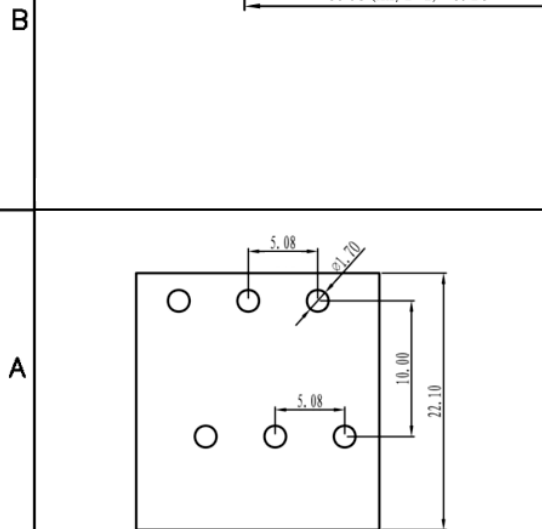

order information

P50844	-	xx	xx	xx	xx
No. of Positions	Colour	Packing	Special Customer		
02~24	10=Green	A= bag			
	xx= on request	BO= Box			
		xx= on request			

variable range	linear dimension				fillet	chamfer	short angle sid				≡	□	∥	⊥			
	to 6	over 6 to 30	over 30 to 120	over 120 to 480			to 6	to 10	over 10 to 50	over 50 to 120					to 10	to 20	to 10'
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

	PROJECTON		Allgemeintoleranz ISO 2768-m	
	DATE		13.04.2018	
	DRAWN		AT	
	CHECKED		MR	
APPROVED		BR		
		UNIT:	SCALE:	SIZE:
		mm		A4