

RoHS REACH
compliant


REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	14.03.18	AT

Technical Specifications

Material
 Pin header: Brass, Sn plated
 Housing: PA66, UL94V-0
 Wire guard: Stainless Steel


Electrical
 ULB IEC
 Rated voltage: 300V 250V
 Rated current: 10A 15A
 Wire range: 22-16AWG 1.0mm²
 Contact resistance: 20mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstanding voltage: AC2000V/1Min

Mechanical
 Temp. Range: -40°C to +105°C
 Max. soldering: +250°C/5 sec
 Strip length: 10mm

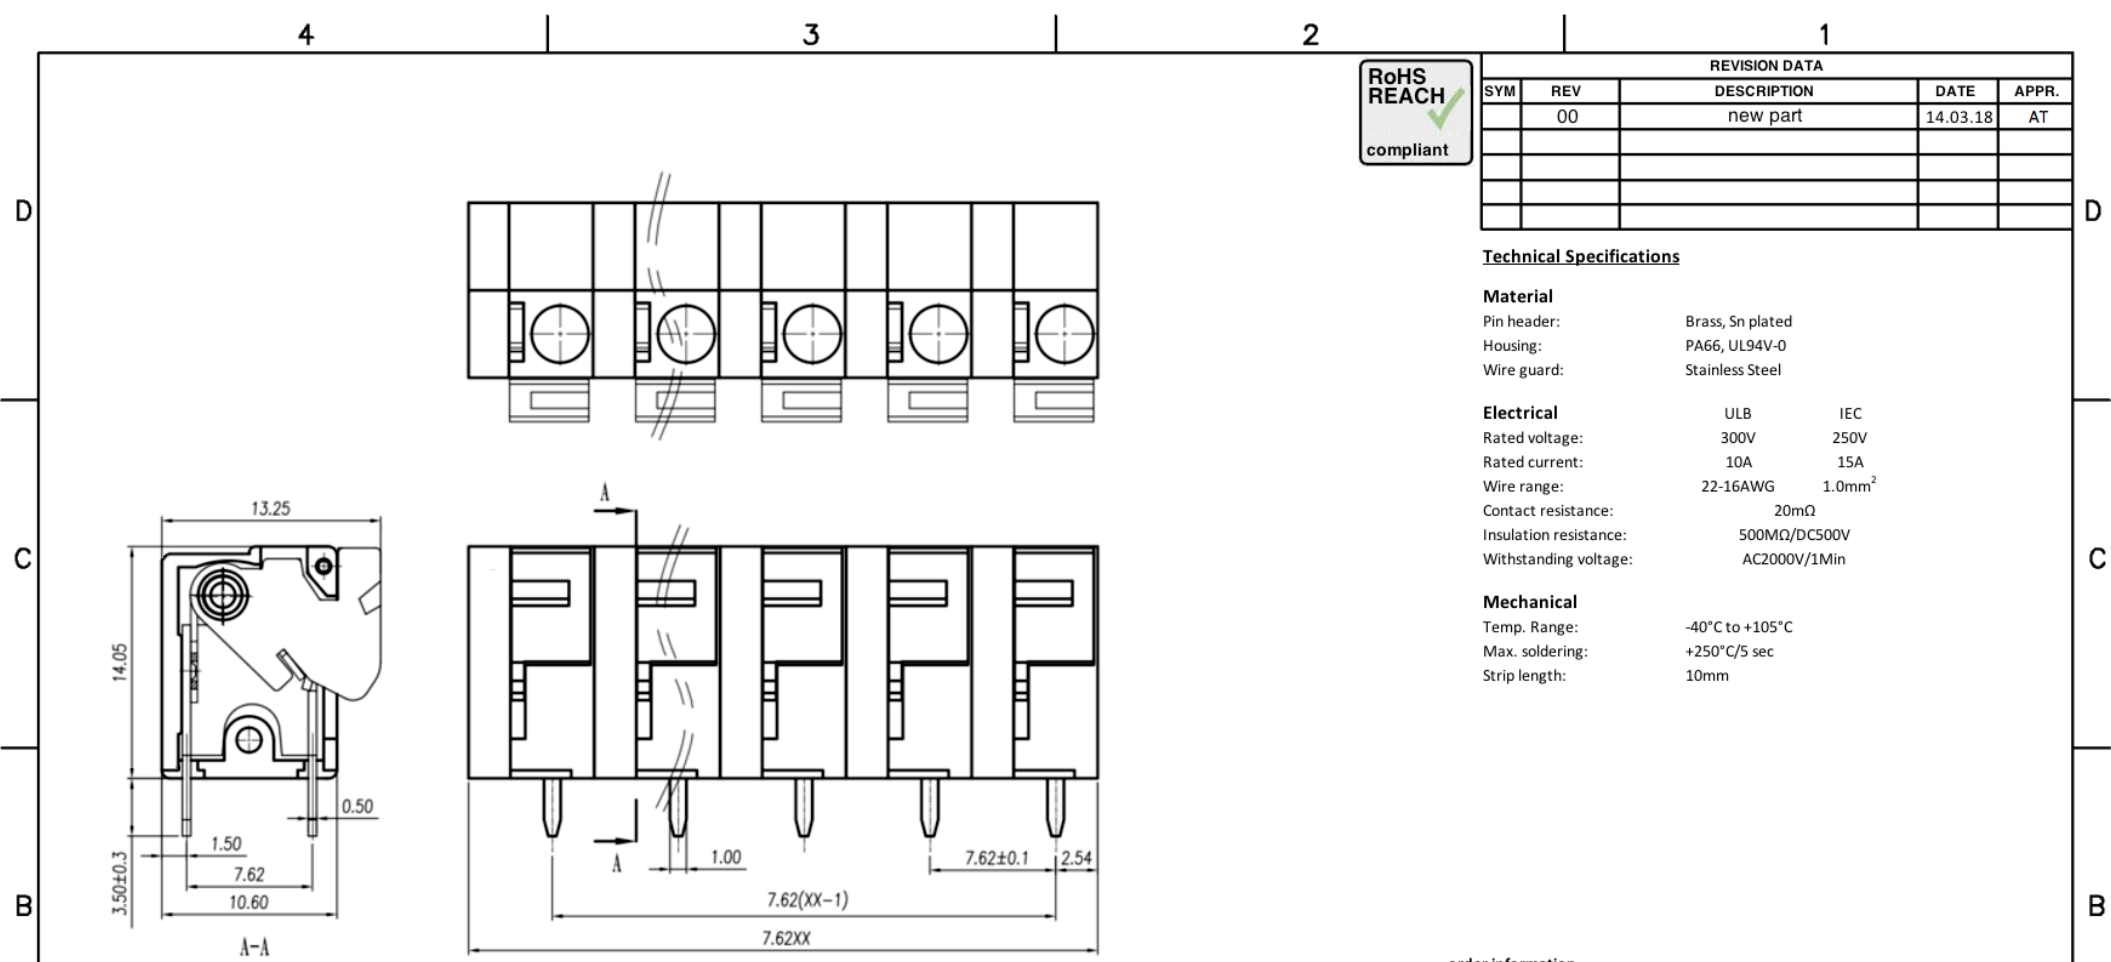

order information

R76220	xx	xx	xx	xx
No. of Positions	Colour	Packing	Special Customer	
01~XXp	10=Green	A= bag		
	xx= on request	BO= Box	xx= on request	

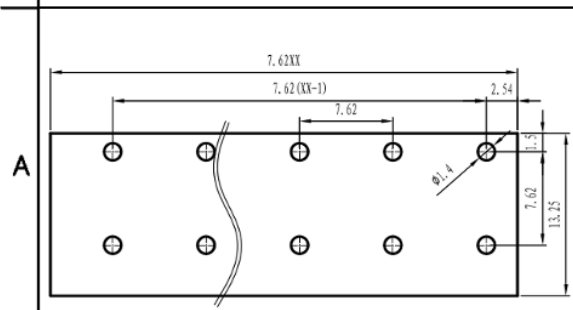

linear dimension(Tolerances Standard GB/T 14486-2008)																
	≡	-	□	//	⊥											
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

		PCB Spring Terminal Block	
PROJECTON			
DATE	14.03.2018	Customer Drawing-No.:	
DRAWN	AT	Drawing-No.:	2161800
CHECKED	MR		
APPROVED	BR	UNIT: mm	SCALE: SIZE: A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.